
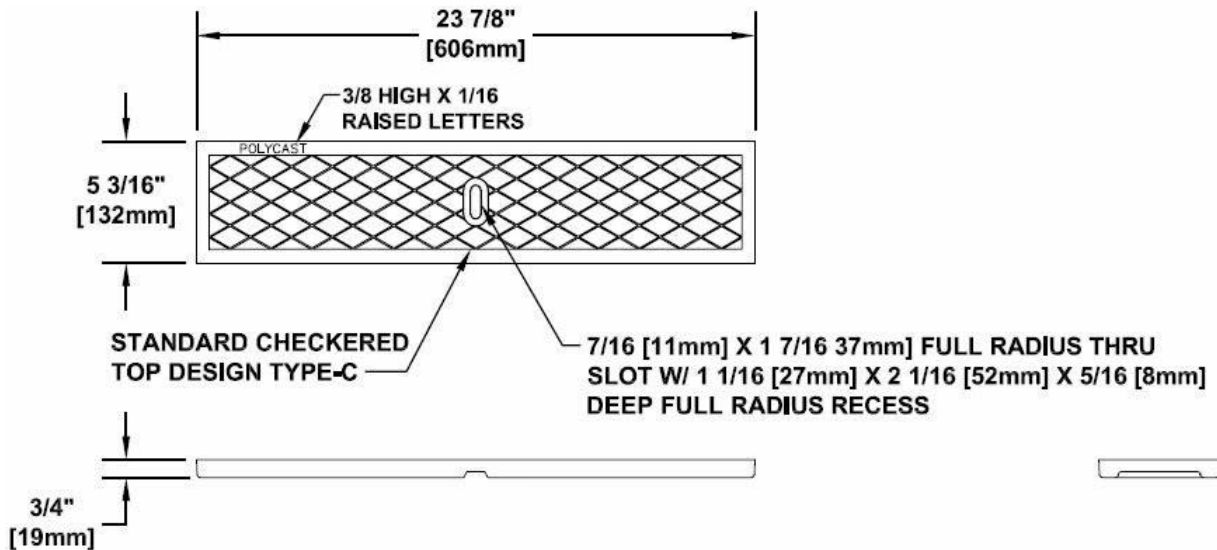


<p>Number</p> <p style="text-align: center;">DG0641S</p>	<p>Series</p> <p style="text-align: center;">TPC600 / 700 D Class Cast Iron Solid Polycast 600 / 700 Series</p>
--	---

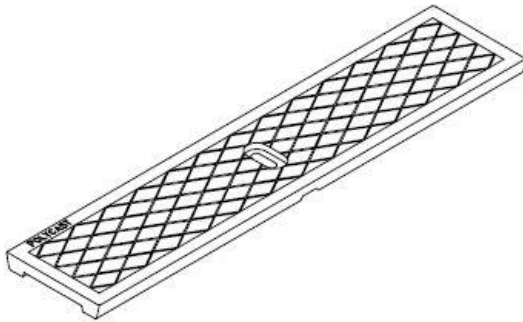

DIN APPLICATION LOAD CLASS D:
Trafficked sections of roads and highways
Designed for a distributed pressure of 89,920 lbs (400 kN).

Meets the following Standards & Specifications:

- DIN 19580 / DIN EN 1433 Drainage Channels for Vehicular and Pedestrian Areas
- The Americans with Disabilities Act of 1990: 4.5.4
- ASME A112.6.3: Section 7.12 Heel Resistant Strainers and Grates
- Australian Standard AS 3996-2006 Clause 3.3.6

Manufacturer



Specification

POLYCAST DG0641S IS APPROPRIATE FOR MANY GENERAL USE CONDITIONS. GRATE LOCKING DEVICE PART NO DA0642B SHOULD BE USED AND MAINTAINED SECURE. THE GRATE HAS 39% (40IN²) OF OPEN AREA. THE GRATE IS MADE OF ASTM A536 GR. 65-45-12 (DUCTILE IRON) AND WEIGHS APPROXIMATELY 18LBS. THE GRATE IS ONLY AVAILABLE IN A 24q(610mm) LENGTH. MEETS LOAD CLASS D.

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.