
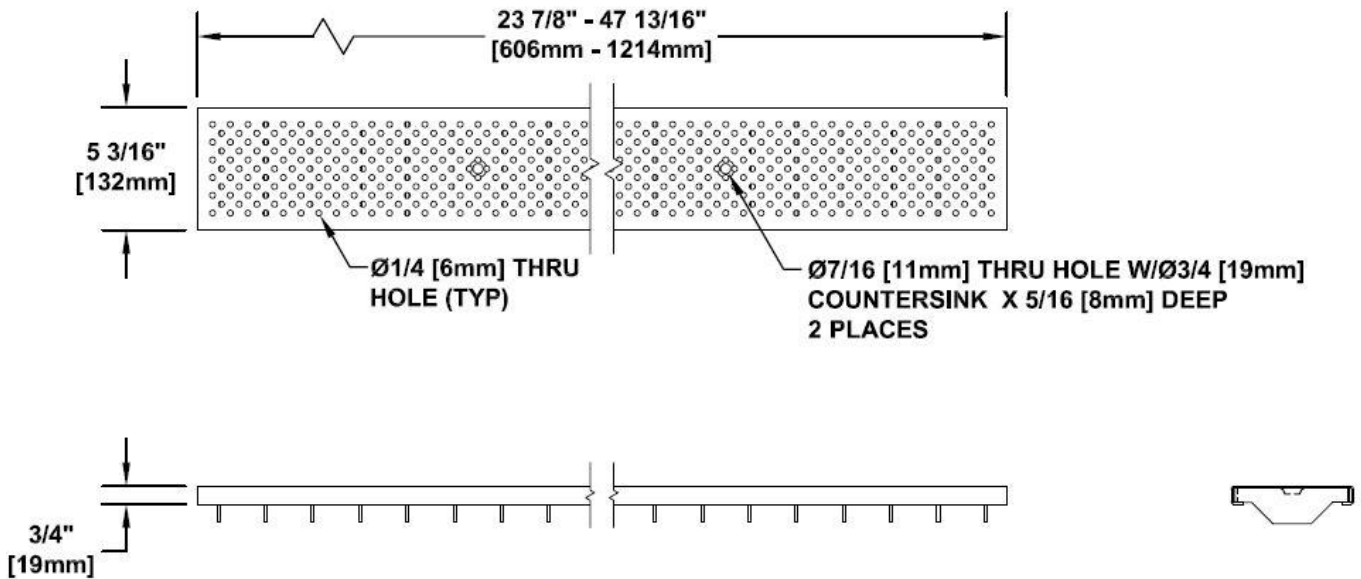


<p>Number</p> <p style="text-align: center;">DG0646R</p>	<p>Series</p> <p style="text-align: center;">TPC600</p> <p style="text-align: center;">C Class Galvanized Perforated Polycast 600</p>
--	---

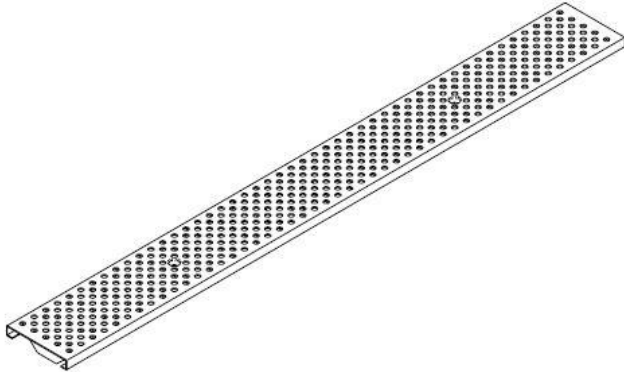

DIN APPLICATION LOAD CLASS C:
Curb sides, highway shoulders, and parking areas
Designed for a distributed pressure of 56,200 lbs (250 kN).

- Meets the following Standards & Specifications:
- DIN 19580 / DIN EN 1433 Drainage Channels for Vehicular and Pedestrian Areas
 - The Americans with Disabilities Act of 1990: 4.5,4
 - ASME A112.6.3: Section 7.12 Heel Resistant Strainers and Grates
 - Australian Standard AS 3996-2006 Clause 3.3.6

Manufacturer



Specification

POLYCAST DG0646R REINFORCED GALVANIZED PERFORATED GRATE IS DESIGNED FOR USE IN PEDESTRIAN AREAS TO MINIMIZE HEEL HAZARD AND PREVENT ENTRANCE OF LARGE OBJECTS. LOCKING DEVICE PART NO DA0642 SHOULD BE USED. THE GRATE HAS 17% (34IN2) OF OPEN AREA. THE GRATE IS MADE OF HOT DIPPED GALVANIZED 14 GAUGE ASTM A36 STEEL AND WEIGHS 12LBS. MEETS LOAD CLASS C.

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.