
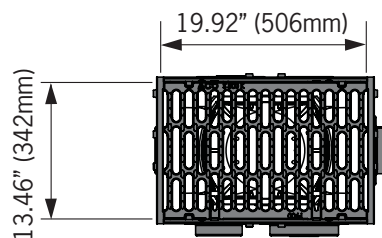


SK1-631D Catch Basin with slotted ductile iron grate

SK1-631D Catch Basin

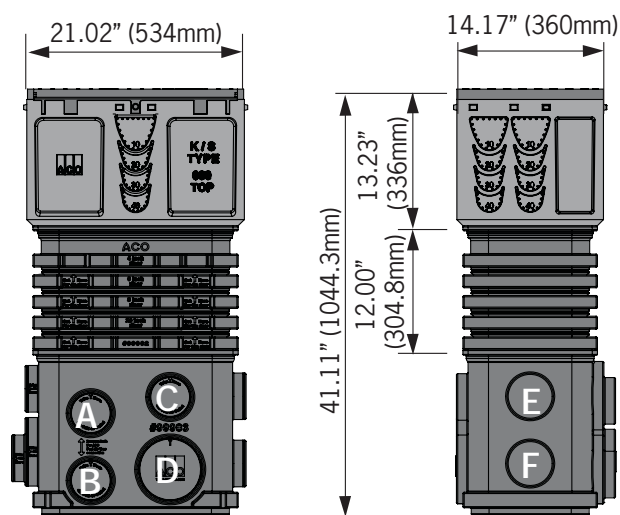

Outlet flow rates

Outlet	Product	Outlet size (Sch. 40)	Invert Depth	GPM	CFS
A	Type SK1-631D	4" round	33.29"	305	0.68
B	Type SK1-631D	4" round	39.79"	335	0.75
C	Type SK1-631D	4" round	31.72"	297	0.66
D	Type SK1-631D	6" round	39.79"	743	1.66
E	Type SK1-631D	4" round	31.84"	297	0.66
F	Type SK1-631D	4" round	38.34"	328	0.73
G	Type SK1-631D	6" round	32.62"	667	1.49
H	Type SK1-631D	4" round	32.07"	299	0.67
I	Type SK1-631D	6" round	39.76"	743	1.65
J	Type SK1-631D	4" round	39.19"	332	0.74
K	Type SK1-631D	6" round	39.19"	737	1.64
L	Type SK1-631D	8" round	39.76"	1302	2.90
M	Type SK1-631D	6" round	38.28"	728	1.62
N	Type SK1-631D	4" round	31.15"	294	0.65
O	Type SK1-631D	4" round	37.86"	326	0.73


Note:

1. These are the pipe flow rates at the specified outlet.



*Flow rates without trash bucket - using trash bucket or filter bag reduces flow rates.

2. 4" diameter foul air trap, part# 90854, can be fitted to catch basin base at outlet positions A/B and E/F

Trash Bucket

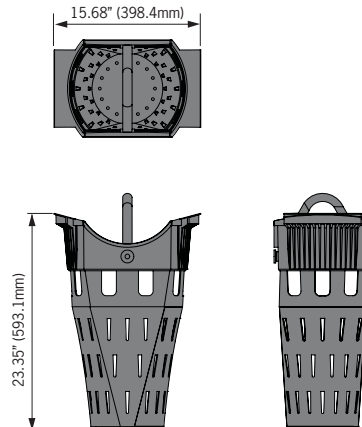

Note: Openings in trash bucket are 74.4in² (48,028mm²)

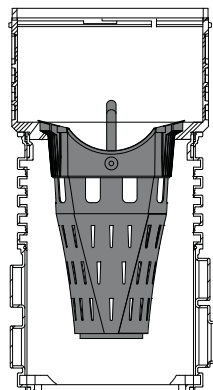

Note: Trash bucket position within SK1-631D catch basin body and base

Supplied By:

**TRENCHDRAIN
SUPPLY**

877-903-7246

www.trenchdrainsupply.com

ACO DRAIN

SK1-631D Catch Basin with slotted ductile iron grate



Description	Part No.	Invert Depth inches	Depth mm	Weight lbs.
Type SK1-631D Catch basin assembly - top, removable "QuickLok" bar, riser, trash bucket & base	94583	40.86	1038	98.7
Catch Basin Components				
Foul air trap - fits both Type 900 & Type 600 basins	90854	-	-	1.2
QuickLok grate removal tool	01318	-	-	0.3

Supplied By:



Specifications		Water absorption	0.07%	and pavement surface. The base and riser unit shall be a LLDPE plastic molding and incorporate molded plastic pipe stubbs to facilitate pipe connection.
General		Frost proof	YES	
The catch basin shall be ACO Drain SK1-631D Catch Basin - comprising of top section, grate, riser, trash bucket and base as manufactured by ACO Polymer Products, Inc. or similar approved.		Salt proof	YES	
		Dilute acid and alkali resistant	YES	
Materials		The nominal clear opening shall be 13.46" (342mm) wide by 19.92" (506mm) long. Overall length of 22.70" (575.8mm) by 15.38" (390.6mm) wide. Type SK1-631D catch basin assembly has overall depth of 41.11" (1044.3mm). Polymer concrete top units shall incorporate a cast in ductile iron frame manufactured with drillouts for channel connection and have a wall thickness of at least 0.59" (15mm). Top units shall have horizontal cast in anchoring key features on the outside to ensure maximum mechanical bond to the surrounding bedding material		
The top unit body shall be manufactured from polyester polymer concrete with minimum properties as follows:		Grates		
Compressive strength: 14,000 psi		Grates are manufactured from slotted ductile iron. Ductile iron to ASTM 536-84 - Grade 65-45-12. After removal of grates there shall be uninterrupted access to the catch basin to aid maintenance.		
Flexural strength: 4,000 psi		Installation		
		The trench drain/catch basin system shall be installed in accordance with the manufacturer's installation instructions and recommendations.		

ACO Polymer Products, Inc.

Northeast Sales Office

P.O. Box 245
Chardon, OH 44024
Tel: (440) 285-7000
Toll free: (800) 543-4764
Fax: (440) 285-7005

West Sales Office

P.O. Box 12067
Casa Grande, AZ 85130
Tel: (520) 421-9988
Toll Free: (888) 490-9552
Fax: (520) 421-9899

Southeast Sales Office

4211 Pleasant Road
Fort Mill, SC 29708
Toll free: (800) 543-4764
Fax: (803) 802-1063

Follow us on



Electronic Contact:

info@ACODrain.us
www.ACODrain.us



© April 9, 2013 ACO Polymer Products, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO Polymer Products Inc. reserves the right to change the product and specifications without notice.

Apr 13/2

www.ACODrain.us

ACO Specification Information