

TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

SPECIFICATION

Sioux Chief 865 Series stainless steel slotted grating shall be used where necessary with FastTrack trench drain channels. Grating shall be corrosion resistant and approved for use in high-traffic, light-duty areas for pedestrian, bicycle and two-wheeled hand cart applications. Grating shall have large, open slots for increased flow capacity into channel and fasten to anchors with screws.

ADA: No

Heel-Proof: No*

Load Rating:

DIN EN 1433: Class A15

ASME A112.6.3: Light Duty

MATERIALS

Grate: 304 Stainless steel - 16 gauge

Screws: Stainless steel

FREE-AREA

60.0 in²

DIMENSIONS

A: Length	36"
B: Width	6"
C: Thickness	3/4"
D: Slot length	5"
E: Slot opening	7/16"

* Per ASME A112.6.3 requirements




Supplied By:

**TRENCH DRAIN
SUPPLY**

877-903-7246

www.trenchdrainsupply.com

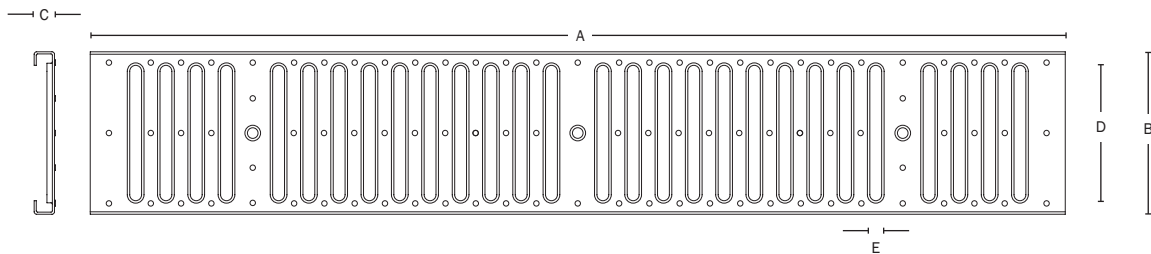

Item Number

865-GSS