

# TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

## SPECIFICATION

Sioux Chief 865 Series ductile iron slotted grating shall be used where necessary with FastTrack trench drain channels. Grating shall be approved for use in heavy-duty applications and for pneumatic-tire forklift and commercial vehicle/equipment traffic at less than 15 mph. Grating shall have large, open slots for increased flow capacity into channel and fasten to anchors with screws.

**ADA:** No

**Heel-Proof:** No\*

**Load Rating:**

DIN EN 1433: Class C250 / D400\*\*

ASME A112.6.3: Special Duty

## MATERIALS

**Grate:** Ductile iron

**Screws:** Stainless steel

## FREE-AREA

86.0 in<sup>2</sup>

## DIMENSIONS

A: Length	36"
B: Width	6"
C: Thickness	3/4"
D: Slot length	5"
E: Slot opening	7/16"

\* Per ASME A112.6.3 requirements

\*\* Grate can be installed with or without ductile iron grate frame (865-F).  
Grate frame must be used in all D400 load class applications.




Supplied By:

**TRENCH DRAIN  
SUPPLY**

877-903-7246

www.trenchdrainsupply.com

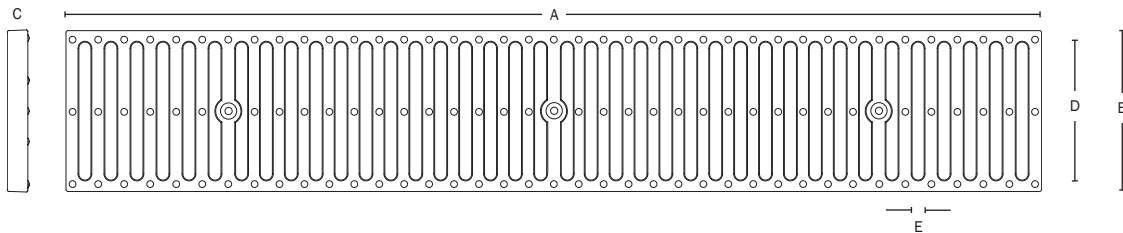

Item Number

**865-GiS**