

<p>Number</p> <p>MAXI Overview</p>	<p>Series</p> <p>MAXI Trench Drain Channel MAXI</p>
--	---

The MAXI trench drain system is ideal for heavy duty applications thanks to its ductile iron frame and grates. With a choice of load classes C, D, E or F, the MAXI system excels at projects requiring the maximum resistance and load bearing capabilities.

Sizes 4", 6", 8" or 12" wide trench drains are available in 39.37" (1000mm) and 19.69" (500mm) long and they are easily joined together by connecting male and female profiles.



- Screwless, patented locking system that reduces time of installation
- Channels available in 4", 6", 8" and 12" wide
- Available flat (all sizes) and pre-sloped (4" and 6" only)



- Ductile Iron Grates
- Available in ADA and Heel Proof
- Longitudinal or Cross Slots
- Load Class C, D, E and F
- High Water Absorption



- Fiber-reinforced concrete C35 / 45 channel
- Ductile Iron Frame
- Precast outlet for a vertical connection to 4" and 6" pipes
- Connecting male and female profiles for precise fit

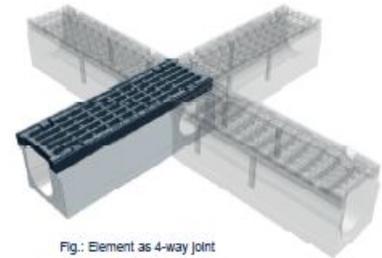
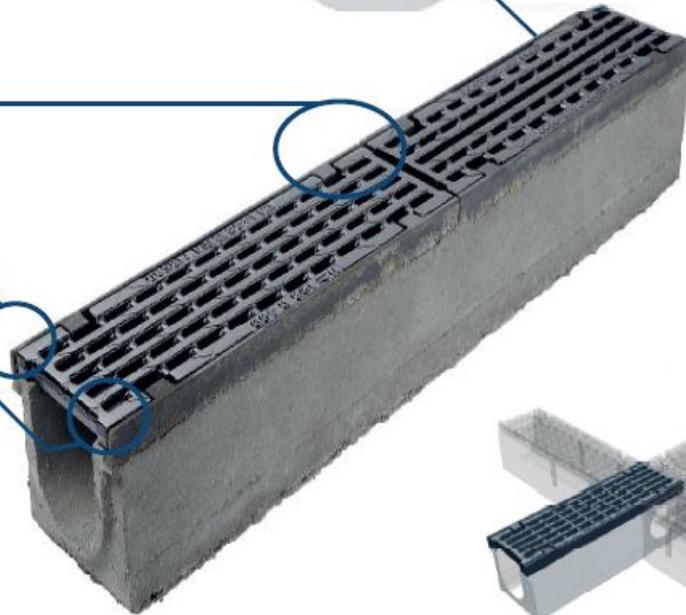


Fig.: Element as 4-way joint

<p>Manufacturer</p> 	<p>Specification</p> <p>HYDROTEC MAXI 100 SERIES FIBER REINFORCED CONCRETE WITH A DUCTILE IRON EDGE 4" WIDTH DRAINAGE CHANNEL. WITH SLOPE , SUPPLIED BY TRENCH DRAIN SUPPLY.</p>
--	---

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.