
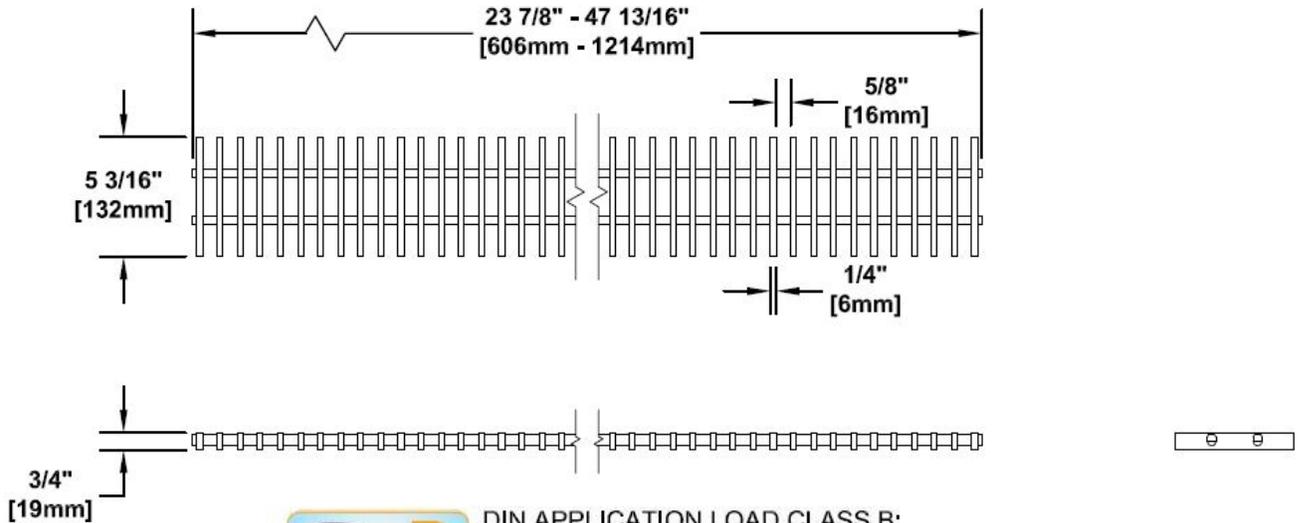


<p><b>Number</b></p> <p style="text-align: center;"><b>DG0644</b></p>	<p><b>Series</b></p> <p style="text-align: center;"><b>TPC600</b></p> <p style="text-align: center;">B Class Fiberglass Bar Grate Polycast 600 Series</p>
---	---

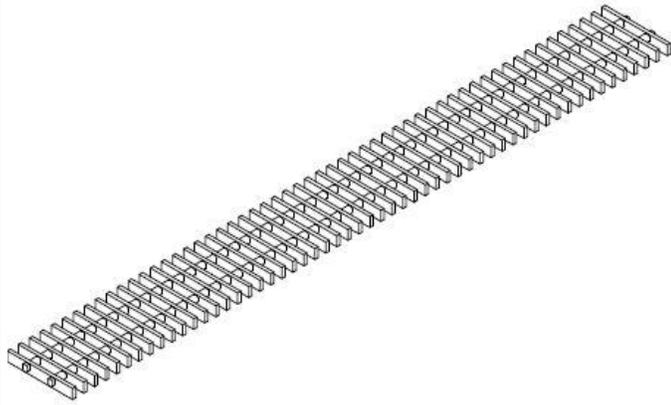

**DIN APPLICATION LOAD CLASS B:**  
Sidewalks, parking lots, and car parking decks  
Designed for a distributed pressure of 28,100 lbs (125 kN).

**Meets the following Standards & Specifications:**

- DIN 19580 / DIN EN 1433 Drainage Channels for Vehicular and Pedestrian Areas
- Australian Standard AS 3996-2006 Clause 3.3.6

**Manufacturer**



**Specification**

POLYCAST DG0644 FIBERGLASS BAR GRATE IS DESIGNED FOR USE WITH POLYCAST VINYLESTER TRENCH IN AREAS REQUIRING EXTREME CHEMICAL RESISTANCE. THE CLEAR OPENING BETWEEN THE BARS IS 5/8+ GRATE LOCKING DEVICE PART NO DA0642F SHOULD BE USED. THE GRATE HAS 46% (114IN2) OF OPEN AREA. WEIGHS APPROXIMATELY 5LBS. MEETS LOAD CLASS B.

**DISCLAIMER** - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.