


Number ULK100	Series U100K
------------------------------------	-----------------------------------

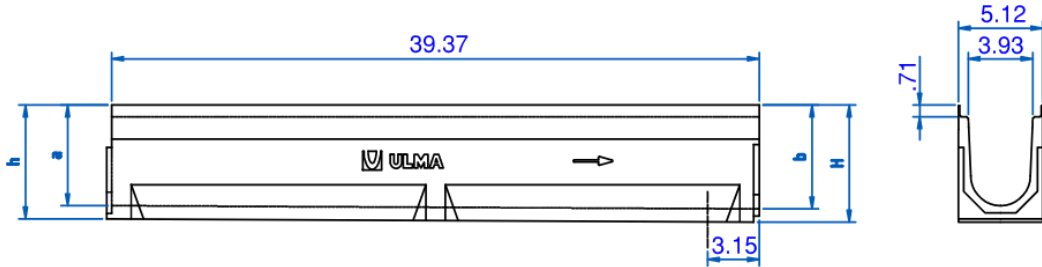

SPORT SYSTEM
External width: 5.12"
Internal width: 3.94"
Length: 39.37"

Channel Reference	Total Height (in)		Internal Height (in)		Hydraulic Section sq. in.	Outlet	
	h	H	A	B		Vertical	Horizontal
U100K.00R	5.9	5.9	5.11	5.11	14.73	4.33	
U100K.01	5.9	6.1	5.11	5.31	15.5		
U100K.02	6.1	6.3	5.31	5.51	16.3		
U100K.03	6.3	6.5	5.51	5.71	17.05		
U100K.04	6.5	6.7	5.71	5.91	17.83		
U100K.05	6.7	6.9	5.91	6.1	18.6		
U100K.05R	6.9	6.9	6.1	6.1	18.6	4.33	
U100K.06	6.9	7.1	6.1	6.3	19.4		
U100K.07	7.1	7.3	6.3	6.5	20.6		
U100K.08	7.3	7.5	6.5	6.7	20.9		
U100K.09	7.5	7.7	6.7	6.9	21.7		
U100K.10	7.7	7.9	6.9	7.1	22.5		
U100K.10R	7.9	7.9	7.1	7.1	22.5	4.33	4.33

Manufacturer




Specification

ULMA U100 Polymer Concrete linear drainage channel
 Integrated Galvanized edge
 Load Class up to C250
 Vertically and Horizontally channel aligning tongue and groove joints

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.

Number ULK100	Series U100K
------------------------------------	-----------------------------------

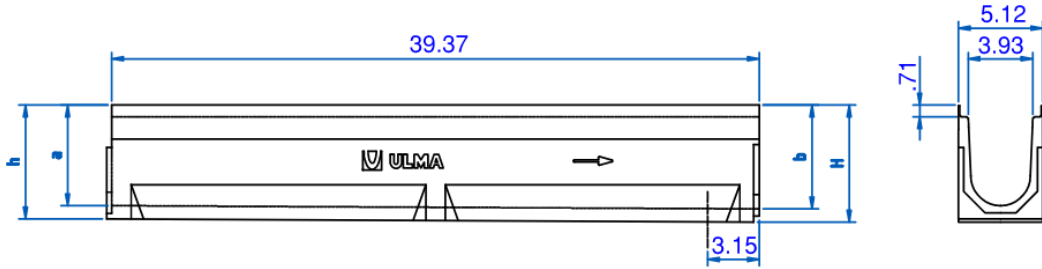

Channel Reference	Total Height (in)		Internal Height (in)		Hydraulic Section in. sq.	Outlet	
	h	H	A	B		Vertical	Horizontal
U100K.11	7.9	8.1	7.1	7.3	23.3	—	—
U100K.12	8.1	8.3	7.3	7.5	24.03	—	—
U100K.13	8.3	8.5	7.5	7.7	24.65	—	—
U100K.14	8.5	8.7	7.7	7.9	25.42	—	—
U100K.15	8.7	8.9	7.9	8.07	26.2	—	—
U100K.15R	8.9	8.9	8.1	8.1	26.2	4.33	4.33
U100K.16	8.9	9.1	8.1	8.3	27	—	—
U100K.17	9.1	9.3	8.3	8.5	27.6	—	—
U100K.18	9.3	9.45	8.5	8.7	28.4	—	—
U100K.19	9.45	9.7	8.7	8.9	28.83	—	—
U100K.20	9.7	9.84	8.9	9.06	29.6	—	—
U100K.20R	9.84	9.84	9.06	9.06	29.6	4.33	4.33
U100K.25R	10.8	10.8	10.04	10.04	33.33	4.33	4.33
U100K.30R	11.81	11.81	11.02	11.02	37.2	4.33	4.33

Manufacturer



Specification

ULMA U100 Polymer Concrete linear drainage channel
 Integrated Galvanized edge
 Load Class up to C250
 Vertically and Horizontally channel aligning tongue and groove joints

DISCLAIMER - The customer and the customer's architects, engineers, consultants, and other professionals are completely responsible for the selection installation and maintenance of any product purchased from Trench Drain Supply and/or its manufacturers. TRENCH DRAIN SUPPLY MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMERS APPLICATION. The drawing and information provided remain the property and copyright of the manufacturer listed. The manufacturer reserves the right to modify specification without notice.