
[®] HI-CAP SLOTTED DRAINAGE SYSTEM WITH HEAVY-DUTY [®] FRAME FOR 12 [305] CORRUGATED PIPE OR EQUIVALENT TAG

Z888-12-HD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

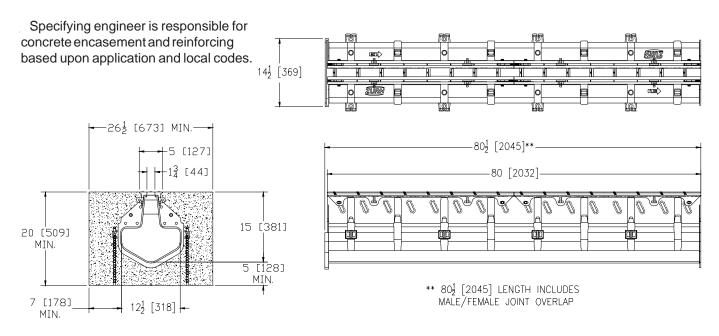

ENGINEERING SPECIFICATION: Zurn Z888-12-HD Slotted Drain channel is 80 [2032] long, 15 [381] deep invert, 12.5 [318] wide with a 1.75 [44] throat width, made from LLDPE linear Low Density Polyethylene. Channels have a mechanical tongue and groove and bolted connection, mechanically lock into the concrete surround every 5 [127] along its length, channels weigh 5.6 lbs. per foot [8.3 kg per meter]. Channel has a smooth 2.5 [64] radiused bottom with a smooth .011 Manning's coefficient, and neutral non-sloping body. Top reveal is non removable and is the finish at the surface, System is anchored into the concrete with Rebar clips or physical anchors every 5 [127] to 10 [254] along the channel body. Integral Rebar Clips are standard. The Channel has a non-removable ductile Iron Frame/Grate conforming to ASTM A536-84, Grade 80-55-06. Minimum 2000 psi concrete encasement shall include longitudinal #4 0.5 [13] rebar along chairs on either side of the trench neck. System is capable of Supporting Class C Loading per DIN EN1433 Top Load Classification.

PREFIX OPTIONS

_____ Z

80 [2032] linear low density polyethylene modular drain channel with integral top frame.*

FRAME OPTIONS

-HDG Galvanized Ductile Iron Frame with Slot
-DYN Dynamic Loading Application

SUFFIX OPTIONS

-E1 End Cap -E4 4 [102] No Hub End Outlet -E6 6 [152] No Hub End Outlet -E8 8 [203] No Hub End Outlet -E12 12 [305] No Hub End Outlet -T12/18 Transition from -12 [305] to -18 [457] -T18/12 Transition from -18 [457] to -12 [305]	Supplied By: TRENCHDRAIN 877-903-7246 www.trenchdrainsupply.com
	REV. A DATE: 08/24/10 C.N. NO. 111588
*Regularly Furnished Unless Otherwise Specified	DWG. NO. 64000 PRODUCT NO. Z888-12-HD
ZURN INDUSTRIES, LLC.	

In Canada: ZURN INDUSTRIES LIMITED + 3544 Nashua Drive + Mississauga, Ontario L4V1L2 + Phone: 905/405-8272 Fax: 905/405-1292