


# Type 847Q/848Q Longitudinal (ADA) stainless steel grate



## Product Features

- Certified to EN 1433 Load Class A - 3,500 lbs - 70 psi
- Uses 'QuickLok' boltless locking system
- Suitable for use with K300, KS300, H300K-13, and H300KS-13 channels
- Manufactured from stainless steel - Grade 304
- Complies with ADA - American Disabilities Act of 1990 Section 4.5.4
- Bicycle Tire Penetration Resistant to AS 3996 - 2006

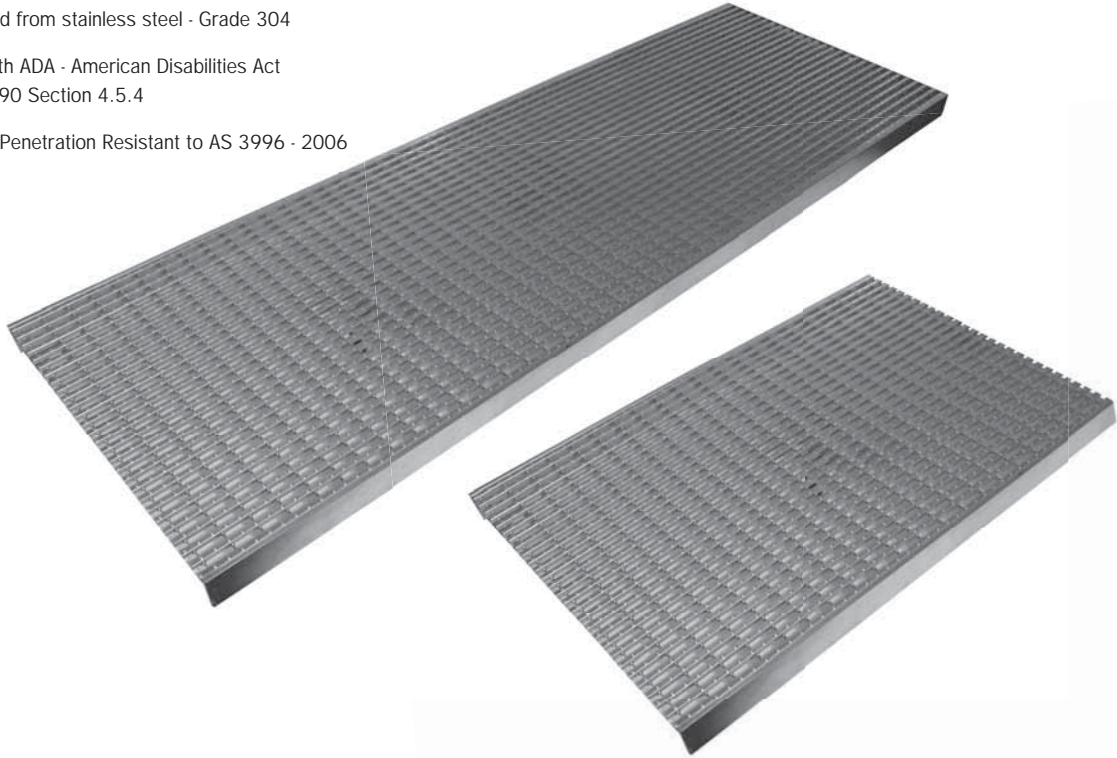

## Specifications

### General

The surface drainage system shall be ACO Drain K300, KS300, H300K-13, and H300KS-13, channels\* complete with ACO Type 847Q/848Q longitudinal (ADA compliant) stainless steel grate with 'QuickLok' locking as manufactured by ACO Polymer Products, Inc. or similar approved.

### Materials

The covers shall be manufactured from stainless steel and have **minimum** properties as follows:

- **Independently certified to meet Load Class A to EN 1433 - 3,500 lbs - 70 psi**
- **Grade 304 stainless steel**
- **Intake area of 113.0 sq. in. (729.0 cm<sup>2</sup>) per half meter of grate/238.2 sq. in. (1536.8 cm<sup>2</sup>) per meter grate**

The overall width of 13.31" (338mm) and overall length of 39.37" (1000mm) (Type 847Q) and overall length of 19.69" (500mm) (Type 848Q). Slots measure at a maximum of 0.21" (5.3mm).

### Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

\* delete as appropriate

Supplied By:

**TRENCHDRAIN  
SUPPLY**

**877-903-7246**

**www.trenchdrainsupply.com**


ACO Specification Information

## ACO DRAIN



### Type 847Q/848Q Longitudinal (ADA) stainless steel grate



Plan view



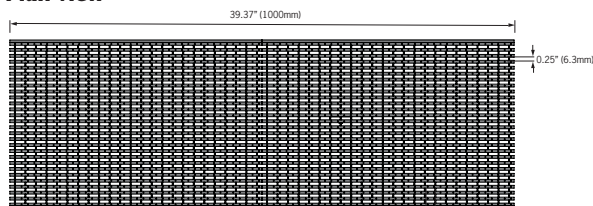


Side elevation

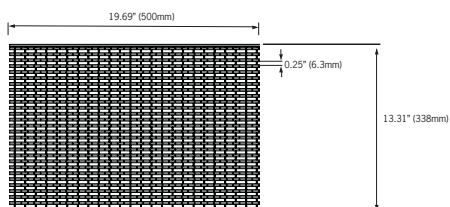

Description	Part No.	Length inches (mm)	Width inches (mm)	Weight lbs.
QuickLok grate				
Type 847Q Stainless steel longitudinal grate	98975	39.37 (1000)	13.31 (338)	28.6
Type 848Q Stainless steel longitudinal grate	98995	19.69 (500)	13.31 (338)	14.3
QuickLok locking bar	10458	-	-	0.5
QuickLok grate removal tool	01318	-	-	0.3

#### 'QuickLok' locking mechanism



ACO 'QuickLok' is a patented boltless locking system, grates are removed and replaced with the minimum time and effort for ease of maintenance. The unique design provides a positive 'snap down' fit into the locking bar. A stud is fixed to the grate which 'locks' into the spring clip in the locking bar.

The 'QuickLok' stud is made from stainless steel and high density nylon, the locking bar and clip are stainless steel, for use in both general purpose and corrosive environments.

Supplied By:  
**TRENCH DRAIN SUPPLY**  
 877-903-7246  
[www.trenchdrainsupply.com](http://www.trenchdrainsupply.com)

#### ACO Polymer Products, Inc.

##### Northeast Sales Office

P.O. Box 245  
 Chardon, OH 44024  
 Tel: (440) 285-7000  
 Toll free: (800) 543-4764  
 Fax: (440) 285-7005

##### West Sales Office

P.O. Box 12067  
 Casa Grande, AZ 85130  
 Tel: (520) 421-9988  
 Toll Free: (888) 490-9552  
 Fax: (520) 421-9899

##### Southeast Sales Office

4211 Pleasant Road  
 Fort Mill, SC 29708  
 Toll free: (800) 543-4764  
 Fax: (803) 802-1063

##### Follow us on



##### Electronic Contact:

[info@ACODrain.us](mailto:info@ACODrain.us)  
[www.ACODrain.us](http://www.ACODrain.us)

© April 19, 2013 ACO Polymer Products, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO Polymer Products Inc. reserves the right to change the product and specifications without notice.

Apr 13/1

[www.ACODrain.us](http://www.ACODrain.us)

**SPEC INFO**  
**ACO**