




Design and Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check ✓	Item No.	Part Number	Item I.D.
	16	64402	P874-12-HPD

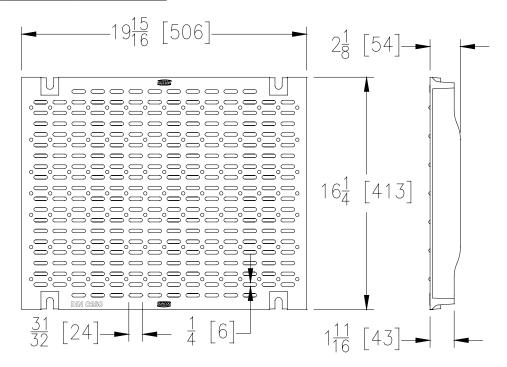

**HPD GRATE ENGINEERING SPECIFICATION:** The Zurn P874-12-HPD Heel-Proof Longitudinal, Ductile Iron Grate, is 16-1/4"[413mm] wide by 19-15/16"[506mm] long, weighing 28.5 lbs per linear foot[42.4 kg/m]. The grate has an open area of 37 square inches per linear foot[783 cm2/m], DIN Rating of C, ANSI Rating of Heavy-Duty, ADA compliant, H-20 Load Rated. Ductile Iron Conforms to ASTM Specification A536, Grade 80-55-06

DGE - Slotted Grate		
Material:	Ductile Iron	
DIN Rating:	Class C	
Weight:	28.5 lbs/ft. [42.4 kg/m]	
Open Area:	37 in <sup>2</sup> /ft. [783 cm <sup>2</sup> /m]	
ANSI Rating:	Heavy-Duty	
Application:	Heavy Vehicle & Truck	
Slot Width/Hole Size:	1/4" [6 mm]	
ADA:	Yes	
H-20:	Yes	
FAA:	No	

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Page 16 of 17

**Zurn Industries, LLC | Specification Drainage Operation** 1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

Rev.